



Side Bow Chains

- Order No. Example
40SB-240 Links

10ft
3m

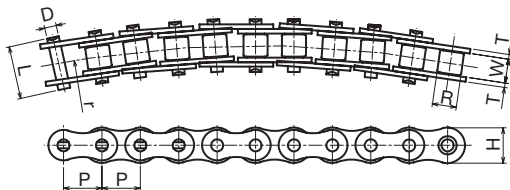

Side Bow Chains are chains whose side surface can recurve to an arc. Curvilinear motion is easily possible by using our standard sprockets.

Use them for curvilinear transportation conveyors with attachments or curved roller conveyor driving.

Chain No.	Pitch P	Roller Outer Diameter R	Inner Link Inner Width W	Link Plate		Pin		Minimum Curve r	Average Tensile Strength kN (kgf)	Maximum Allowable Tension kN (kgf)
				Thickness T	Width H	Diameter D	Length L			
40SB	12.70	7.92	7.95	1.5	11.7	3.59	17.90	350	11.8 (1,200)	1.86 (190)
50SB	15.875	10.16	9.53	2.0	14.6	4.51	22.65	400	20.6 (2,100)	2.84 (290)
60SB	19.05	11.91	12.70	2.4	17.5	5.09	27.70	500	28.0 (2,860)	4.02 (410)

Chain No.	Approx. Weight kg/m	Unit				JL	
		No. of Links	m	No. in Box (Quantity)	¥	¥	No. in Box (Quantity)
40SB	0.60	240L	3	10			100
50SB	0.98	192L		5			50
60SB	1.38	160L		5			25



Order Method

Chain No. Unit and Quantity



Postage

Same-day shipping (Unit Only)

* Products with dimensional cutting are shipped in 3 working days.



Precautions

* There are no OL for Side Bow Chains.

* Dimensional cutting products will be charged as a combination of product price with chain cutting fee included.



Use Examples

For continued lubrication and effective anti-corrosion, protect your chains with Kanalon. See P344

