

High-Strength Type Stainless Steel (AS) Chains




Order No. Example

40-SUS AS 240 Links

Chain No.

10ft 3m

Unit

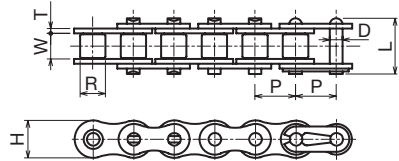

Products with improved allowable tension by replacing pins and rollers of stainless steel chains with precipitation-hardened stainless steel.

Since they have maximum allowable tension 1.5 times higher than stainless steel chains, use them where the allowable tension of stainless chains is not sufficient.

Chain No.	Pitch P	Roller Outer Diameter R	Inner Link Inner Width W	Maximum Allowable Tension kN (kgf)	Unit				JL & OL	
					No. of Links	m	No. in Box (Quantity)	¥	¥	
									JL	OL
40-SUS AS	12.70	7.92	7.95	0.69 (70)	240L	3	1			
50-SUS AS	15.875	10.16	9.53	1.03 (105)	192L					
60-SUS AS	19.05	11.91	12.70	1.57 (160)	160L					
80-RPSUS AS	25.40	15.87	15.88	2.65 (270)	120L					



Order Method

Chain No. Material Unit and Quantity



Postage

3-day shipping (Unit Only)

- * Products with dimensional cutting are shipped in 5 working days.
- * Single order system available



Precautions

- * Their corrosion resistance effectiveness is slightly lower than stainless steel chains. Can be used at -20°C to 400°C. Note: Magnetized due to the use of precipitation-hardened stainless steel.
- * The D/L/H dimensions are the same as ►► P70 to P71 Standard Roller Chains.
- * Dimensional cutting products will be charged as a combination of product price with chain cutting fee included.



Use Examples

When used in food machinery, use 3H (direct food contact-safe oil) Bio-Adnil spray certified by NSF International. See P346

