

KANA Standard Roller Chains


Triplex Roller Chains

● Order No. Example

KANA 40-3R 240 Links
10ft

Chain No.

Unit

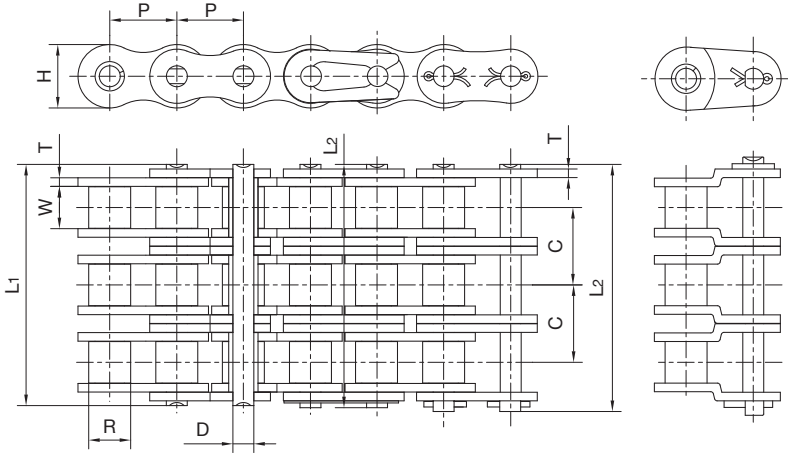

Chain No.	Pitch P mm	Roller Outer Diameter R mm	Inner Link Inner Width W mm	Pin Diameter D mm	Pin Length		Link Plate Width H mm	Link Plate Thickness T mm	Transverse Pitch C mm	Average Tensile Strength kN	Approx. Weight kg/m
					L1 mm	L2 mm					
40-3	12.70	7.95	7.85	3.96	45.4	46.6	12.00	1.5	14.38	55.8	1.90
50-3	15.875	10.16	9.40	5.08	57.0	58.5	15.09	2.0	18.11	93.9	3.09
60-3	19.05	11.91	12.57	5.94	71.5	73.3	18.00	2.4	22.78	129.6	4.54
80-3	25.40	15.88	15.75	7.92	91.7	93.6	24.00	3.2	29.29	222.9	7.89
100-3	31.75	19.05	18.90	9.53	112.2	116.3	30.00	4.0	35.76	322.8	11.77
120-3	38.10	22.23	25.22	11.10	141.4	145.2	35.70	4.8	45.44	489.3	17.53
140-3	44.45	25.40	25.22	12.70	152.2	156.8	41.00	5.6	48.87	667.5	22.20
160-3	50.80	28.58	31.55	14.27	181.8	186.6	47.80	6.4	58.55	800.7	30.02