

Cost-Performance Product

KANA Roller Chains

● Order No. Example


KANA40-RP 240 Links

Chain No.

Pin Type

Unit

10ft
3m

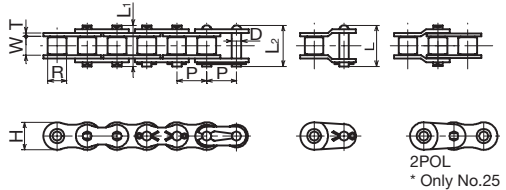

2POL
* Only No.25

KANA standard roller chains are manufactured with strict management. Cost-performance products.

| Chain No. | Pin Type | Pitch P | Roller Outside Diameter R | Inner Link Inner Width W | Link Plate | | Diameter D | Pin | | |
|-----------|----------|---------|---------------------------|--------------------------|-------------|---------|------------|--------|-------|-------|
| | | | | | Thickness T | Width H | | Length | | |
| | | | | | | | | L1 | L2 | L |
| KANA 25 | RP | 6.35 | ★3.30 | 3.10 | 0.75 | 5.8 | 2.31 | 7.75 | 8.8 | 9.35 |
| KANA 35 | RP | 9.525 | ★5.08 | 4.68 | 1.15 | 8.8 | 3.60 | 11.7 | 12.65 | 13.45 |
| KANA 40 | RP | 12.70 | 7.92 | 7.85 | 1.50 | 11.8 | 3.98 | 16.25 | 17.8 | 18.70 |
| KANA 50 | RP | 15.875 | 10.16 | 9.40 | 2.00 | 14.7 | 5.09 | 20 | 21.55 | 22.85 |
| KANA 60 | RP | 19.05 | 11.91 | 12.57 | 2.35 | 17.8 | 5.96 | 24.9 | 26.9 | 28.10 |
| KANA 80 | RP | 25.40 | 15.88 | 15.75 | 3.2 | 23.8 | 7.94 | 32.4 | 35.8 | 36.10 |
| | CP | | | | | | | 39.5 | | |
| KANA 100 | RP | 31.75 | 19.05 | 18.8 | 4 | 29.95 | 9.54 | 43.05 | 43.05 | 44.50 |
| | CP | | | | | | | 53.8 | | |
| KANA 120 | CP | 38.1 | 22.22 | 25.23 | 4.7 | 35.5 | 11.11 | 53.8 | 53.8 | 55.30 |

| Chain No. | Pin Type | Average Tensile Strength kN (kgf) | Approx. Weight kg/m | Unit | | | | JL & OL | | |
|-----------|----------|-----------------------------------|---------------------|--------------|------|-----------------------|--------------|---------|----|-----------------------|
| | | | | No. of Links | m | No. in Box (Quantity) | ¥ | ¥ | | No. in Box (Quantity) |
| | | | | | | | | JL | OL | |
| KANA 25 | RP | 3.9 (400) | 0.13 | 480L | 3 | 1 | | | | 25 |
| | | | | 320L | 3 | 1 | | | | 25 |
| KANA 35 | RP | 9.8 (1000) | 0.35 | 8,000L | 76 | Reel Winding | | | | 25 |
| | | | | 240L | 3 | 1 | | | | 25 |
| KANA 40 | RP | 19.1 (1950) | 0.62 | 2,400L | 30 | Reel Winding | | | | 25 |
| | | | | 192L | 3 | 1 | | | | 25 |
| KANA 50 | RP | 29.4 (3000) | 1.07 | 1,920L | 30 | Reel Winding | | | | 25 |
| | | | | 160L | 3 | 1 | | | | 25 |
| KANA 60 | RP | 45.1 (4600) | 1.53 | 1,600L | 30 | Reel Winding | | | | 25 |
| | | | | 120L | 3 | 1 | | | | 25 |
| KANA 80 | RP | 73.5 (7500) | 2.82 | 120L | 3 | 1 | | | | 25 |
| | | | | 2.85 | 120L | 3 | 1 | | | |
| | | | | 2.82 | 600L | 15 | Reel Winding | | | |
| KANA 100 | RP | 118.6 (12100) | 4.13 | 96L | 3 | 1 | | | | 10 |
| | | | | 4.17 | 96L | 3 | 1 | | | |
| KANA 120 | CP | 156.8 (16000) | 5.70 | 80L | 3 | 1 | | | | 10 |



Chain No. Pin Type Unit and Quantity



- * ★ indicates the bushing diameter of bushed chains.
- * Pin type: RP is a rivet type and CP is a cotter pin type.
- * The offset link of KANA 25 is a 2-pitch type.
- * Dimensional cutting products will be charged as a combination of product price with chain cutting fee included.



Same-day shipping (Unit Only)

* Products with dimensional cutting are shipped in 3 working days.