


KANA Roller Chains with Straight Side Plates

● Order No. Example

**KANA C08B-1R 240 Links
10ft**

Chain No.

Unit

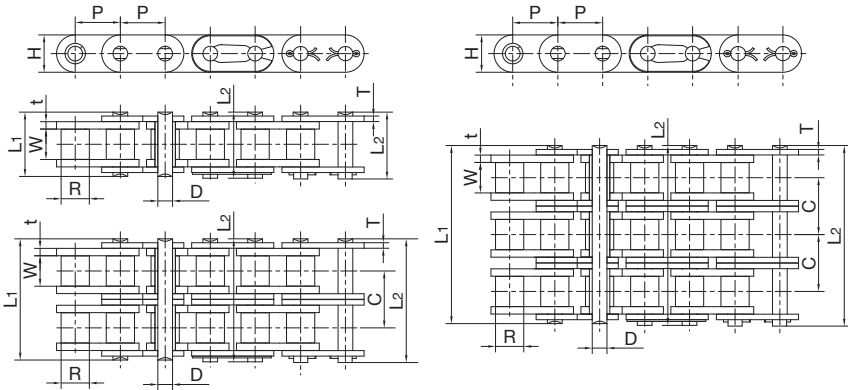

Chain No.	Pitch P mm	Roller Outer Diameter R mm	Inner Link Inner Width W mm	Pin Diameter D mm	Pin Length		Link Plate Width H mm	Link Plate Thickness t/T mm	Transverse Pitch C mm	Average Tensile Strength kN	Approx. Weight kg/m
					L ₁ mm	L ₂ mm					
C08B-1	12.70	8.51	7.75	4.45	16.7	18.2	11.8	1.60	-	19.5	0.80
C10B-1	15.875	10.16	9.65	5.08	19.5	20.9	14.7	1.70	-	27.9	1.06
C12B-1	19.05	12.70	11.68	5.72	22.5	25.2	16.0	1.85	-	32.2	1.32
C16B-1	25.40	15.88	17.02	8.28	36.1	39.1	21.0/24.0	4.15/3.10	-	72.8	3.08/3.49
C20B-1	31.75	19.05	19.56	10.19	41.3	45.0	26.4	4.50/3.50	-	106.7	4.16
C24B-1	38.10	25.40	25.40	14.63	53.4	57.8	33.2	6.00/4.80	-	178.0	7.47
C08B-2	12.70	8.51	7.75	4.45	31.2	32.2	11.8	1.60	13.92	38.7	1.45
C10B-2	15.875	10.16	9.65	5.08	36.1	37.5	14.7	1.70	16.59	57.8	2.00
C12B-2	19.05	12.07	11.68	5.72	42.0	44.7	16.0	1.85	19.46	66.1	2.62
C16B-2	25.40	15.88	17.02	8.28	68.0	71.0	21.0/24.0	4.15/3.10	31.88	133.0	6.10/6.92
C20B-2	31.75	19.05	19.56	10.19	77.8	81.5	26.4	4.50/3.50	36.45	211.2	8.23
C24B-2	38.10	25.40	25.40	14.63	101.7	106.2	33.2	6.00/4.80	48.36	319.2	14.77