


# KANA Roller Chains with Straight Side Plates

## ● Order No. Example

**KANA C40-1R 240 Links**  
**10ft**

Chain No.

Unit

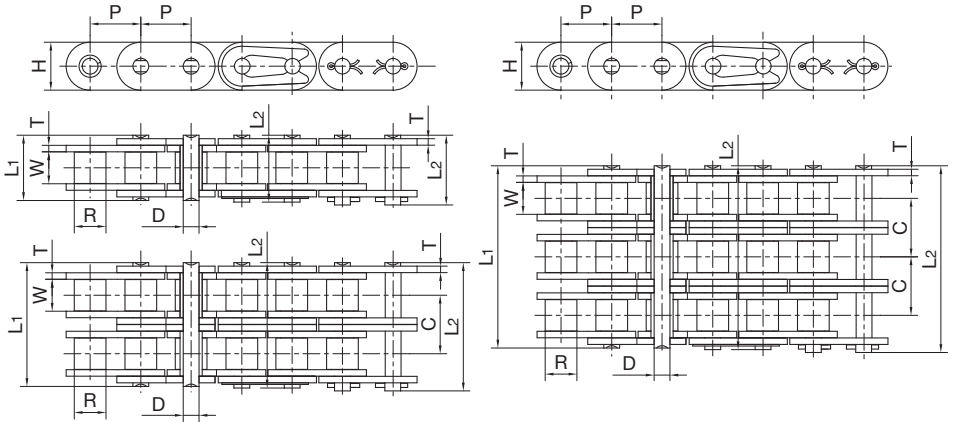

Chain No.	Pitch P mm	Roller Outer Diameter R mm	Inner Link Inner Width W mm	Pin Diameter D mm	Pin Length		Link Plate Width H mm	Link Plate Thickness T mm	Transverse Pitch C mm	Average Tensile Strength kN	Approx. Weight kg/m
					L1 mm	L2 mm					
C40-1	12.70	7.95	7.85	3.96	16.6	18.8	12.00	1.5	-	17.5	0.73
C50-1	15.875	10.16	9.40	5.08	20.7	23.3	15.09	2.0	-	29.4	1.23
C60-1	19.05	11.91	12.57	5.94	25.9	28.3	18.00/18.20	2.4	-	41.5	1.81/1.83
C80-1	25.40	15.88	15.75	7.92	32.7	36.5	24.00	3.2	-	69.4	3.09
C100-1	31.75	19.05	18.90	9.53	40.4	44.7	30.00	4.0	-	109.2	4.56
C120-1	38.10	22.23	25.22	11.10	50.3	54.3	35.70	4.8	-	156.3	6.86
C40-2	12.70	7.95	7.85	3.96	31.0	33.2	12.00	1.5	14.38	35.9	1.43
C50-2	15.875	10.16	9.40	5.08	38.9	41.4	15.09	2.0	18.11	58.1	2.42
C60-2	19.05	11.91	12.57	5.94	48.8	51.1	18.00/18.20	2.4	22.78	82.1	3.58/3.62
C80-2	25.40	15.88	15.75	7.92	62.7	65.8	24.00	3.2	29.29	141.8	6.12
C100-2	31.75	19.05	18.90	9.53	76.4	80.5	30.00	4.0	35.76	219.4	9.08
C120-2	38.10	22.23	25.22	11.10	95.8	99.7	35.70	4.8	45.44	314.9	13.60