



KCM Double Pitch Chains with Side Roller

Just as with side rollers, R roller type chain material is available in standard steel, engineered plastic or rubber tire. Select depending on the objects to be transported or environment conditions.

1P Staggered Type

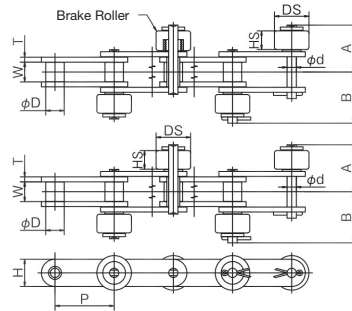

2P Parallel Type

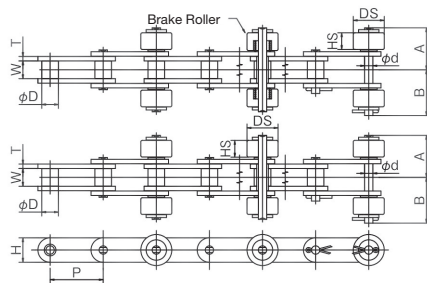

(Units: mm)

Chain No.	Pitch P	Inner Link Inner Width W	Roller Outer Diameter D	Pin			Side Roller		Added mass (kg) per side roller		
				Diameter d	A	B	DS	HS	Steel	Engineered Plastic	Rubber Tire
KCM C2040 KCM C2042	25.40	7.95	7.92 15.88	3.97	18.475	20.675	15.88 23.0	7.8	0.014 0.029	0.004 0.007	0.007 0.016
KCM C2050 KCM C2052	31.75	9.53	10.16 19.05	5.09	22.5	24.5	19.05 27.0	9.4	0.024 0.050	0.006 0.013	0.012 0.030
KCM C2060H KCM C2062H	38.10	12.70	11.91 22.23	5.96	30.1	32.8	22.23 30.0	12.6	0.043 0.077	0.010 0.019	0.025 0.049
KCM C2080H KCM C2082H	50.80	15.88	15.88 28.58	7.94	37.85	40.95	28.58 38.1	15.7	0.086 0.150	0.025 0.038	0.045 0.095
KCM C2100H KCM C2102H	63.50	19.05	19.05 39.67	9.54	45.725	48.675	39.69 50.8	18.8	0.195 0.320	0.055 0.072	0.092 0.205