





L050 Type

K-Timing Pulley <Prepared Hole Product>

● Order No. Example

K 20 L050 BF (Type)
 STYLE No. of Teeth Type Shape
 Timing Pulley No. L050
 W: 14
 H: 2.5

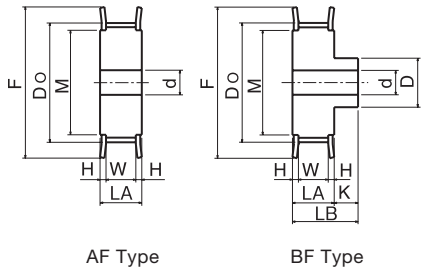

The KANA Timing Pulley achieves clean transmission thanks to its low noise that comes by way of its excellent timing transmission performance.

Type	No. of Teeth	Shape	Dp	Do	LA	LB	K	D	d		F	M	Compatible Flanges	Pulley Approx. Weight kg	
									min	max				AF	BF
L050	10	AF, BF	30.32	29.56	19	31	12	20	6	14	35	22	KTF-103522	0.08	0.14
	12	AF, BF	36.38	35.62	19	31	12	25	8	18	43	28	KTF-104328	0.12	0.21
	14	AF, BF	42.45	41.68	19	31	12	30	10	20	47	34	KTF-104734	0.17	0.29
	15	AF, BF	45.48	44.72	19	31	12	32	10	20	51	36	KTF-165136	0.20	0.34
	16	AF, BF	48.51	47.75	19	31	12	34	12	22	55	39	KTF-165539	0.23	0.38
	17	AF, BF	51.54	50.78	19	31	12	35	12	22	57	41	KTF-165741	0.26	0.43
	18	AF, BF	54.57	53.81	19	31	12	36	12	24	61	41	KTF-166141	0.30	0.47
	19	AF, BF	57.61	56.84	19	31	12	38	12	24	65	50	KTF-166550	0.33	0.53
	20	AF, BF	60.64	59.88	19	31	12	40	12	26	65	50	KTF-166550	0.37	0.59
	21	AF, BF	63.67	62.91	19	31	12	42	12	26	69	50	KTF-166950	0.42	0.66
	22	AF, BF	66.70	65.94	19	31	12	44	12	28	74	53	KTF-167453	0.46	0.72
	24	AF, BF	72.77	72.00	19	31	12	44	12	28	78	58	KTF-167858	0.55	0.82
	25	AF, BF	75.80	75.04	19	31	12	44	12	28	83	63	KTF-168363	0.60	0.87
	26	AF, BF	78.83	78.07	19	31	12	44	12	28	86	66	KTF-168666	0.66	0.92
	28	AF, BF	84.89	84.13	19	31	12	50	12	30	93	75	KTF-169375	0.77	1.11
	30	AF, BF	90.96	90.20	19	31	12	50	12	30	99	78	KTF-169978	0.89	1.23
	32	AF, BF	97.02	96.26	19	34	15	50	16	30	105	84	KTF-1610584	1.01	1.38
	34	AF, BF	103.08	102.32	19	34	15	56	16	32	112	90	KTF-1611290	1.14	1.62
	36	AF, BF	109.15	108.39	19	34	15	56	16	32	115	90	KTF-1611590	1.29	1.77
	38	AF, BF	115.21	114.45	19	34	15	60	16	34	126	100	KTF-16126100	1.42	1.97
40	AF, BF	121.28	120.51	19	34	15	60	16	34	126	100	KTF-16126100	1.61	2.16	
42	AF, BF	127.34	126.58	19	34	15	60	16	34	131	101	KTF-16131101	1.78	2.33	
44	AF, BF	133.40	132.64	19	39	20	65	16	38	138	125	KTF-16138125	1.96	2.73	



Timing Pulley No. and Quantity



* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.




Same-day shipping



* The prepared hole diameter is finished at the minimum diameter H7. Comes with a flange.

K-Timing Pulley <Prepared Hole Product>


L050 Type



Use Examples

* Please use with timing belt. ▶▶ P.440 -

* While flanges are included, for additional flanges, consult here. ▶▶ P.434 -



* L050 (for 12.7mm)

Product Name	Material
Pulley	Carbon Steel
Flange	Common Steel

Type	No. of Teeth	AF		BF	
		¥	Semi-F ¥	¥	Semi-F ¥
L 050	10				
	12				
	14				
	15				
	16				
	17				
	18				
	19				
	20				
	21				
	22				
	24				
	25				
	26				
	28				
	30				
	32				
	34				
36					
38					
40					
42					
44					

* Please refer to P24 to P33 for the Semi-F Series <Complete Product> order method.