





# L075-type

## K-Timing Pulley <Prepared Hole Product>

### Order No. Example

**K 20 L075 BF** (Type)  
 STYLE No. of Teeth Type Shape  
 Timing Pulley No.  
**L075**  
 W: 21  
 H: 2.5

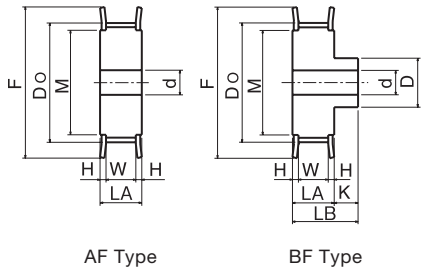

The KANA Timing Pulley achieves clean transmission thanks to its low noise that comes by way of its excellent timing transmission performance.

Type	No. of Teeth	Shape	Dp	Do	LA	LB	K	D	d		F	M	Compatible Flanges	Pulley Approx. Weight kg	
									min	max				AF	BF
<b>L075</b>	12	AF, BF	36.38	35.62	26	38	12	25	8	18	43	28	KTF-104328	0.17	0.27
	14	AF, BF	42.45	41.68	26	38	12	30	10	20	47	34	KTF-104734	0.24	0.38
	15	AF, BF	45.48	44.72	26	38	12	32	10	20	51	36	KTF-165136	0.28	0.45
	16	AF, BF	48.51	47.75	26	38	12	34	12	22	55	39	KTF-165539	0.31	0.50
	17	AF, BF	51.54	50.78	26	38	12	35	12	22	57	41	KTF-165741	0.36	0.56
	18	AF, BF	54.57	53.81	26	38	12	36	12	24	61	41	KTF-166141	0.41	0.62
	19	AF, BF	57.61	56.84	26	38	12	38	12	24	65	50	KTF-166550	0.46	0.70
	20	AF, BF	60.64	59.88	26	38	12	40	12	26	65	50	KTF-166550	0.51	0.78
	21	AF, BF	63.67	62.91	26	38	12	42	12	26	69	50	KTF-166950	0.57	0.86
	22	AF, BF	66.70	65.94	26	38	12	44	12	28	74	53	KTF-167453	0.63	0.95
	24	AF, BF	72.77	72.00	26	38	12	44	12	28	78	58	KTF-167858	0.76	1.08
	25	AF, BF	75.80	75.04	26	38	12	44	12	28	83	63	KTF-168363	0.83	1.15
	26	AF, BF	78.83	78.07	26	38	12	44	12	28	86	66	KTF-168666	0.90	1.22
	28	AF, BF	84.89	84.13	26	38	12	50	12	30	93	75	KTF-169375	1.05	1.47
	30	AF, BF	90.96	90.20	26	38	12	50	12	30	99	78	KTF-169978	1.22	1.64
	32	AF, BF	97.02	96.26	26	41	12	50	16	30	105	84	KTF-1610584	1.38	1.83
	34	AF, BF	103.08	102.32	26	41	15	56	16	32	112	90	KTF-1611290	1.56	2.14
	36	AF, BF	109.15	108.39	26	41	15	56	16	32	115	90	KTF-1611590	1.76	2.34
	38	AF, BF	115.21	114.45	26	41	15	60	16	34	126	100	KTF-16126100	1.96	2.51
	40	AF, BF	121.28	120.51	26	41	15	60	16	34	126	100	KTF-16126100	2.20	2.86
42	AF, BF	127.34	126.58	26	41	15	60	16	34	131	101	KTF-16131101	2.43	3.09	
44	AF, BF	133.40	132.64	26	46	20	65	16	38	138	125	KTF-16138125	2.68	3.58	



Timing Pulley No. and Quantity



\* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.



Same-day shipping



\* The prepared hole diameter is finished at the minimum diameter H7. Comes with a flange.

# K-Timing Pulley <Prepared Hole Product>

# L075-type



Use Examples

\* Please use with timing belt. ▶▶ P.440 -

\* While flanges are included, for additional flanges, consult here. ▶▶ P.434 -



Product Name	Material
Pulley	Carbon Steel
Flange	Common Steel

\* L075 (for 19.0mm)

Type	No. of Teeth	AF		BF	
		¥	Semi-F ¥	¥	Semi-F ¥
<b>L 075</b>	12				
	14				
	15				
	16				
	17				
	18				
	19				
	20				
	21				
	22				
	24				
	25				
	26				
	28				
	30				
	32				
34					
36					
38					
40					
42					
44					

\* Please refer to P24 to P33 for the Semi-F Series <Complete Product> order method.