


Super Torque Timing Pulley S5M (for 10mm belt width)




S5M100-type

● Order No. Example

K 20 S5M100 BF




(Type)
S5M100
W: 11
H: 2.5



AF

BF

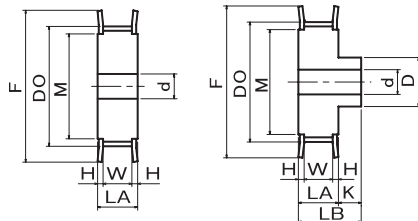

AF Type

BF Type

The KANA Timing Pulley achieves clean transmission thanks to its low noise that comes by way of its excellent timing transmission performance.

Type	No. of Teeth	Shape	Dp	Do	LA	LB	K	D	d		F	M	Compatible Flanges	Pulley Approx. Weight kg	
									min	max				AF	BF
S5M 100	14	AF, BF	22.28	21.32	16	28	12	14	7	8	26	16	KTF-102616	0.037	0.047
	15	AF, BF	23.87	22.91	16	28	12	15	7	8	28	18	KTF-102818	0.044	0.058
	16	AF, BF	25.46	24.50	16	28	12	17	7	10	31	20	KTF-103120	0.052	0.071
	18	AF, BF	28.65	27.69	16	28	12	19	7	12	33	22	KTF-103322	0.066	0.090
	20	AF, BF	31.83	30.87	16	28	12	19	7	12	35	22	KTF-103522	0.079	0.104
	22	AF, BF	35.01	34.05	16	28	12	25	7	18	40	28	KTF-104028	0.101	0.145
	24	AF, BF	38.20	37.24	16	28	12	29	7	21	44	32	KTF-104432	0.125	0.184
	25	AF, BF	39.79	38.83	16	28	12	29	7	21	44	32	KTF-104432	0.132	0.192
	26	AF, BF	41.38	40.42	16	28	12	31	8	22	47	34	KTF-104734	0.144	0.210
	28	AF, BF	44.56	43.60	16	28	12	33	8	24	48	36	KTF-104836	0.165	0.241
	30	AF, BF	47.75	46.79	16	28	12	33	10	24	51	36	KTF-165136	0.193	0.266
	32	AF, BF	50.93	49.97	16	28	12	38	10	28	54	41	KTF-165441	0.224	0.323
	36	AF, BF	57.30	56.34	16	28	12	38	10	28	61	41	KTF-166141	0.284	0.384
	40	AF, BF	63.66	62.70	16	28	12	47	10	34	69	50	KTF-166950	0.364	0.520
	44	AF, BF	70.03	69.07	16	28	12	50	12	38	74	53	KTF-167453	0.432	0.607
	48	AF, BF	76.39	75.43	16	28	12	60	12	43	83	63	KTF-168363	0.534	0.789
	50	AF, BF	79.58	78.62	16	28	12	63	12	45	86	66	KTF-168666	0.581	0.864
	60	AF, BF	95.49	94.53	16	28	12	75	12	54	99	78	KTF-169978	0.830	1.236



Timing Pulley No. and Quantity



Postage

Same-day shipping



Guide



Precautions

* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.

* The prepared hole diameter is finished at the minimum diameter H7. Comes with a flange.

Super Torque Timing Pulley S5M <for 10mm belt width> **S5M100-type**



Use Examples

* Please use with timing belt. ▶▶ P.440 -

* While flanges are included, for additional flanges, consult here. ▶▶ P.434 -



Product Name	Material
Pulley	Carbon Steel
Flange	Common Steel

* S5M (for 10mm)

Type	No. of Teeth	AF		BF	
		¥	Semi-F ¥	¥	Semi-F ¥
S5M 100	14				
	15				
	16				
	18				
	20				
	22				
	24				
	25				
	26				
	28				
	30				
	32				
	36				
	40				
	44				
	48				
50					
60					

* Please refer to P24 to P33 for the Semi-F Series <Complete Product> order method.