


Super Torque Timing Pulley S5M <for belt with 15mm width>



S5M150 Type


Order No. Example

K 20 S5M150 BF




Timing Pulley No.

(Type)
S5M150
W: 17
H: 2.5



AF

BF

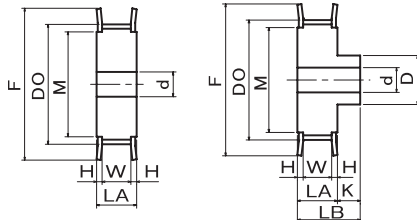

AF Type

BF Type

The KANA Timing Pulley achieves clean transmission thanks to its low noise that comes by way of its excellent timing transmission performance.

Type	No. of Teeth	Shape	Dp	Do	LA	LB	K	D	d		F	M	Compatible Flanges	Pulley Approx. Weight kg	
									min	max				AF	BF
S5M 150	14	AF, BF	22.28	21.32	22	34	12	14	7	8	26	16	KTF-102616	0.050	0.060
	15	AF, BF	23.87	22.91	22	34	12	15	7	8	28	18	KTF-102818	0.059	0.074
	16	AF, BF	25.46	24.50	22	34	12	17	7	10	31	20	KTF-103120	0.070	0.090
	18	AF, BF	28.65	27.69	22	34	12	19	7	12	33	22	KTF-103322	0.089	0.114
	20	AF, BF	31.83	30.87	22	34	12	19	7	12	35	22	KTF-103522	0.109	0.134
	22	AF, BF	35.01	34.05	22	34	12	25	7	18	40	28	KTF-104028	0.139	0.182
	24	AF, BF	38.20	37.24	22	34	12	29	7	21	44	32	KTF-104432	0.170	0.229
	25	AF, BF	39.79	38.83	22	34	12	29	7	21	44	32	KTF-104432	0.182	0.241
	26	AF, BF	41.38	40.42	22	34	12	31	8	22	47	34	KTF-104734	0.197	0.263
	28	AF, BF	44.56	43.60	22	34	12	33	8	24	48	36	KTF-104836	0.227	0.303
	30	AF, BF	47.75	46.79	22	34	12	33	10	24	51	36	KTF-165136	0.265	0.338
	32	AF, BF	50.93	49.97	22	34	12	38	10	28	54	41	KTF-165441	0.306	0.406
	36	AF, BF	57.30	56.34	22	34	12	38	10	28	61	41	KTF-166141	0.391	0.490
	40	AF, BF	63.66	62.70	22	34	12	47	10	34	69	50	KTF-166950	0.497	0.653
	44	AF, BF	70.03	69.07	22	34	12	50	12	38	74	53	KTF-167453	0.594	0.769
	48	AF, BF	76.39	75.43	22	34	12	60	12	43	83	63	KTF-168363	0.729	0.985
	50	AF, BF	79.58	78.62	22	34	12	63	12	45	86	66	KTF-168666	0.794	1.077
	60	AF, BF	95.49	94.53	22	34	12	75	12	54	99	78	KTF-169978	1.143	1.549



Timing Pulley No. and Quantity



* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.



Same-day shipping



* The prepared hole diameter is finished at the minimum diameter H7. Comes with a flange.

Super Torque Timing Pulley S5M <for 15mm belt width> **S5M150 Type**



Use Examples

* Please use with timing belt. ▶▶ P.440 -

* While flanges are included, for additional flanges, consult here. ▶▶ P.434 -



Product Name	Material
Pulley	Carbon Steel
Flange	Common Steel

* S5M (for 15mm)

Type	No. of Teeth	AF		BF	
		¥	Semi-F ¥	¥	Semi-F ¥
S5M 150	14				
	15				
	16				
	18				
	20				
	22				
	24				
	25				
	26				
	28				
	30				
	32				
	36				
	40				
	44				
	48				
50					
60					

* Please refer to P24 to P33 for the Semi-F Series <Complete Product> order method.