


Super Torque Timing Pulley S5M <For belt with 25mm width>



S5M250 Type


Order No. Example

K 20 S5M250 BF




Timing Pulley No.

(Type)
S5M250
W: 27
H : 2.5



AF

BF

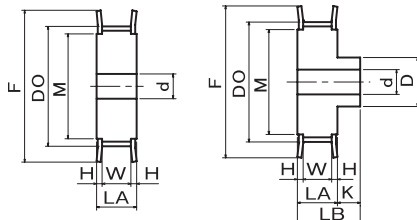

AF Type

BF Type

The KANA Timing Pulley achieves clean transmission thanks to its low noise that comes by way of its excellent timing transmission performance.

Type	No. of Teeth	Shape	Dp	Do	LA	LB	K	D	d		F	M	Compatible Flanges	Pulley Approx. Weight kg	
									min	max				AF	BF
S5M 250	14	AF, BF	22.28	21.32	32	44	12	14	7	8	26	16	KTF-102616	0.072	0.082
	15	AF, BF	23.87	22.91	32	44	12	15	7	8	28	18	KTF-102818	0.085	0.100
	16	AF, BF	25.46	24.50	32	44	12	17	7	10	31	20	KTF-103120	0.100	0.120
	18	AF, BF	28.65	27.69	32	44	12	19	7	12	33	22	KTF-103322	0.129	0.154
	20	AF, BF	31.83	30.87	32	44	12	19	7	12	35	22	KTF-103522	0.160	0.185
	22	AF, BF	35.01	34.05	32	44	12	25	7	18	40	28	KTF-104028	0.201	0.244
	24	AF, BF	38.20	37.24	32	44	12	29	7	21	44	32	KTF-104432	0.245	0.305
	25	AF, BF	39.79	38.83	32	44	12	29	8	21	44	32	KTF-104432	0.264	0.324
	26	AF, BF	41.38	40.42	32	44	12	31	8	22	47	34	KTF-104734	0.285	0.351
	28	AF, BF	44.56	43.60	32	44	12	33	8	24	48	36	KTF-104836	0.331	0.407
	30	AF, BF	47.75	46.79	32	44	12	33	10	24	51	36	KTF-165136	0.383	0.457
	32	AF, BF	50.93	49.97	32	44	12	38	10	28	54	41	KTF-165441	0.443	0.543
	36	AF, BF	57.30	56.34	32	44	12	38	10	28	61	41	KTF-166141	0.568	0.667
	40	AF, BF	63.66	62.70	32	44	12	47	10	34	69	50	KTF-166950	0.720	0.876
	44	AF, BF	70.03	69.07	32	44	12	50	12	38	74	53	KTF-167453	0.865	1.039
	48	AF, BF	76.39	75.43	32	44	12	60	12	43	83	63	KTF-168363	1.055	1.310
	50	AF, BF	79.58	78.62	32	44	12	63	12	45	86	66	KTF-168666	1.149	1.432
	60	AF, BF	95.49	94.53	32	44	12	75	12	54	99	78	KTF-169978	1.665	2.070



Order Method

Timing Pulley No. and Quantity



Guide

* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.



Postage

Same-day shipping



Precautions

* The prepared hole diameter is finished at the minimum diameter H7. Comes with a flange.

Super Torque Timing Pulley S5M <for 25mm belt width> **S5M250 Type**



Use Examples

* Please use with timing belt. ▶▶ P.440 -

* While flanges are included, for additional flanges, consult here. ▶▶ P.434 -



Product Name	Material
Pulley	Carbon Steel
Flange	Common Steel

* S5M (for 25mm)

Type	No. of Teeth	AF		BF	
		¥	Semi-F ¥	¥	Semi-F ¥
S5M 250	14				
	15				
	16				
	18				
	20				
	22				
	24				
	25				
	26				
	28				
	30				
	32				
	36				
	40				
	44				
	48				
50					
60					

* Please refer to P24 to P33 for the Semi-F Series <Complete Product> order method.