


Super Torque Timing Pulley S8M <For belt with 25mm width>



S8M250-type


● Order No. Example

K 20 S8M250 BF




Timing Pulley No.

(Type)
S8M250
W: 28
H : 3.5



AF

BF

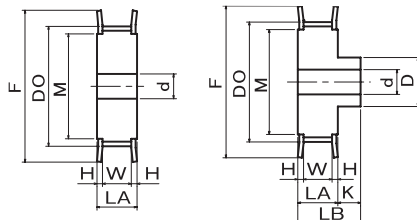

AF Type

BF Type

The KANA Timing Pulley achieves clean transmission thanks to its low noise that comes by way of its excellent timing transmission performance.

Type	No. of Teeth	Shape	Dp	Do	LA	LB	K	D	d		F	M	Compatible Flanges	Pulley Approx. Weight kg	
									min	max				AF	BF
S8M 250	18	AF, BF	45.84	44.46	35	50	15	32	12	20	54	36	KTF-235436	0.34	0.43
	19	AF, BF	48.38	47.01	35	50	15	35	12	22	57	39	KTF-235739	0.38	0.50
	20	AF, BF	50.93	49.56	35	50	15	36	12	22	60	40	KTF-236040	0.43	0.55
	21	AF, BF	53.48	52.10	35	50	15	40	12	24	62	44	KTF-236244	0.49	0.64
	22	AF, BF	56.02	54.65	35	50	15	41	12	25	65	45	KTF-236545	0.54	0.70
	24	AF, BF	61.12	59.74	35	50	15	46	12	28	70	50	KTF-237050	0.66	0.86
	25	AF, BF	63.66	62.29	35	50	15	48	16	29	72	52	KTF-237252	0.71	0.90
	26	AF, BF	66.21	64.84	35	50	15	51	16	30	75	55	KTF-237555	0.76	1.00
	28	AF, BF	71.30	69.93	35	50	15	55	16	34	80	60	KTF-238060	0.90	1.18
	30	AF, BF	76.39	75.02	35	50	15	60	16	36	85	65	KTF-238565	1.06	1.39
	32	AF, BF	81.49	80.12	35	50	15	65	16	38	90	70	KTF-239070	1.22	1.61
	34	AF, BF	86.58	85.21	35	50	15	70	16	42	95	75	KTF-239575	1.40	1.85
	36	AF, BF	91.67	90.30	35	50	15	75	16	45	100	80	KTF-2310080	1.58	2.10
	38	AF, BF	96.77	95.39	35	50	15	80	20	48	105	85	KTF-2310585	1.77	2.33
	40	AF, BF	101.86	100.49	35	50	15	85	20	50	110	90	KTF-2311090	1.95	2.62
	44	AF, BF	112.05	110.67	35	55	20	90	20	56	121	101	KTF-23121101	2.39	3.39
	48	AF, BF	122.23	120.86	35	55	20	100	20	62	131	111	KTF-23131111	2.88	4.12
	50	AF, BF	127.32	125.95	35	55	20	100	20	62	136	116	KTF-23136116	3.15	4.38
	60	AF, BF	152.79	151.42	35	55	20	100	20	62	161	141	KTF-23161141	4.64	5.88



Timing Pulley No. and Quantity



Postage

Same-day shipping



Guide



Precautions

* Since we also manufacture sizes other than those in the catalog, and machine shaft holes/keys/taps, etc., depending on your request, please contact our company's sales office for details.

* The prepared hole diameter is finished at the minimum diameter H7. Comes with a flange.

Super Torque Timing Pulley S8M <for 25mm belt width> **S8M250-type**



Use Examples

* Please use with timing belt. ▶▶ P.440 -

* While flanges are included, for additional flanges, consult here. ▶▶ P.434 -



Product Name	Material
Pulley	Carbon Steel
Flange	Common Steel

* S8M (for 25mm)

Type	No. of Teeth	AF		BF	
		¥	Semi-F ¥	¥	Semi-F ¥
S8M 250	18				
	19				
	20				
	21				
	22				
	24				
	25				
	26				
	28				
	30				
	32				
	34				
	36				
	38				
	40				
	44				
	48				
	50				
60					

* Please refer to P24 to P33 for the Semi-F Series <Complete Product> order method.