


SUS Idler Sprockets

Order Product Code SUSID 40C 15 D15

TYPE No. No. of Teeth
Sprocket No.

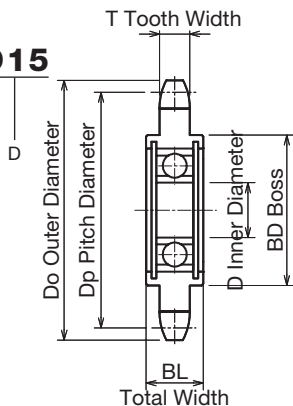

The KANA standard SUS (stainless steel) idler sprocket holds tension at the appropriate level during roller chain transmission. This product is made of stainless steel having excellent corrosion resistance and durability. The stainless steel bearing is located in the center of the sprocket.

m Stainless Steel **GB** 304

TYPE	No.	No. of Teeth	D	Do	Dp	T	BD	BL	SUS Bearing No.	Weight kg
SUSID	35C	16	10	54	48.824	4.3	38	14	6000ZZ	0.12
		12	12	60	54.852				6001ZZ	0.11
		18	15	69	63.908				6202ZZ	0.17
		21	17	81	75.997				6203ZZ	0.25
		25	20						6204ZZ	0.34
	40C	13	10	59	53.068	7.2	38	14	6000ZZ	0.16
		12	12	67	61.084				6001ZZ	0.15
		15	15	76	69.116				6202ZZ	0.20
		17	17	84	77.159				6203ZZ	0.31
		19	20						6204ZZ	0.41
	50C	12	12	69	61.336	8.7	43	16	6201ZZ	0.22
		13	15	74	66.335				6202ZZ	0.24
		15	17	84	76.355				6203ZZ	0.38
		17	20	94	86.395				6204ZZ	0.50
	60C	11	12	76	67.617	11.7	44	16	6201ZZ	0.27
		15	15	89	79.602				6202ZZ	0.28
		13	17	95	85.610				6203ZZ	0.47
	80C	14	20			14.6	60	21	6204ZZ	0.57
		9	15	85	74.265				6202ZZ	0.39
		10	17	93	82.196				6203ZZ	0.58
11		20	102	90.156	6204ZZ				0.70	



* The bearing is located in the center of the sprocket.

Caution