


C-type Double Idler Sprockets


Order Product Code WID 40C 15 D15

TYPE No. No. of Teeth
Sprocket No. D

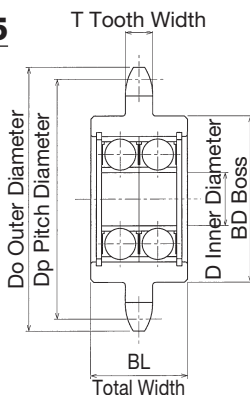

<KANA Idler Sprocket Features>

1. Double snap rings used
(Can be easily extracted or pressed in without damaging the bearings, convenient for plating or other surface processing.)
2. Snap rings used that do not interfere with stepped shaft



- m** Carbon Structural Steel
- h** High-frequency Hardened Teeth

TYPE	No.	No. of Teeth	D	Do	Dp	T	BD	BL	Bearing No.	Weight kg
WID	35C	16	10	54	48.824	4.3	38	22	6000ZZ	0.13
		12	12	60	54.852		44	28	6202ZZ	0.21
		17	17	69	63.908		53	31	6203ZZ	0.31
		25	20	81	75.997		60	35	6204ZZ	0.44
	40C	13	10	59	53.068	7.2	38	22	6000ZZ	0.17
		12	12	67	61.084		44	28	6202ZZ	0.25
		17	17	76	69.116		53	31	6203ZZ	0.37
		19	20	84	77.159		60	35	6204ZZ	0.51
	50C	12	12	69	61.336	8.7	43	26	6201ZZ	0.25
		13	15	74	66.335		44	28	6202ZZ	0.28
		15	17	84	76.355		53	31	6203ZZ	0.44
		17	20	94	86.395		60	35	6204ZZ	0.60
	60C	11	12	76	67.617	11.7	44	26	6201ZZ	0.30
		15	15	89	79.602		28	28	6202ZZ	0.32
		13	17	89	79.602		53	31	6203ZZ	0.53
	80C	14	20	95	85.610	14.6	60	35	6204ZZ	0.67
9		15	85	74.265	44		28	6202ZZ	0.43	
10		17	93	82.196	52		31	6203ZZ	0.64	
11		20	102	90.156	60		35	6204ZZ	0.80	



* The bearing is located in the center of the sprocket.

Caution