


# B-type Double Idler Sprockets

## Order Product Code


### WID 40B 15 D15

TYPE      No.      No. of Teeth  
Sprocket No.      D

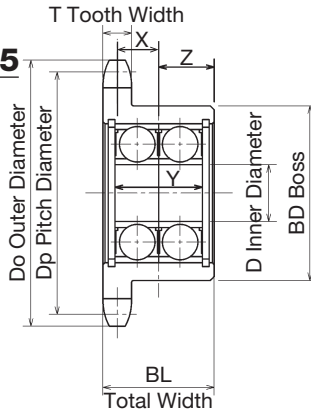

<KANA Idler Sprocket Features>

1. Double snap rings used  
(Can be easily extracted or pressed in without damaging the bearings, convenient for plating or other surface processing.)
2. Snap rings used that do not interfere with stepped shaft



**m** Carbon Structural Steel

**h** High-frequency Hardened Teeth

TYPE	No.	No. of Teeth	D	Do	Dp	T	BD	BL	Bearing Center Z from Boss End Face	Eccentricity X	Bearing No.	Total Bearing Width Y	Weight kg
WID	35B	16	10	54	48.824	4.3	38	22	11	8.85	6000ZZ	16	0.14
		12	54	48.824	38		22	11	8.85	6001ZZ	16	0.15	
		18	15	60	54.852		44	28	14	11.85	6202ZZ	22	0.23
		21	17	69	63.908		53	31	15.5	13.35	6203ZZ	24	0.32
	25	20	81	75.997	60	35	17.5	15.35	6204ZZ	28	0.46		
	40B	13	10	59	53.068	7.2	38	22	11	7.4	6000ZZ	16	0.19
		12	59	53.068	38		22	11	7.4	6001ZZ	16	0.18	
		15	15	67	61.084		44	28	14	10.4	6202ZZ	22	0.27
		17	17	76	69.116		53	31	15.5	11.9	6203ZZ	24	0.39
	19	20	84	77.159	60	35	17.5	13.9	6204ZZ	28	0.59		
	50B	12	12	69	61.336	8.7	43	26	13	8.65	6201ZZ	20	0.27
		13	15	74	66.335		44	28	14	9.65	6202ZZ	22	0.31
		15	17	84	76.355		53	31	15.5	11.15	6203ZZ	24	0.46
		17	20	94	86.395		60	35	17.5	13.15	6204ZZ	28	0.66
	60B	11	12	76	67.617	11.7	44	26	13	7.15	6201ZZ	20	0.35
		15	15	76	67.617		28	14	8.15	6202ZZ	22	0.36	
		13	17	89	79.602		53	31	15.5	9.65	6203ZZ	24	0.56
	14	20	95	85.610	60	35	17.5	11.65	6204ZZ	28	0.70		
	80B	9	15	85	74.265	14.6	44	28	14	6.7	6202ZZ	22	0.46
		10	17	93	82.196		53	31	15.5	8.2	6203ZZ	24	0.62
11		20	102	90.156	60		35	17.5	10.2	6204ZZ	28	0.80	