

KANA Standard Roller Chains


Duplex Roller Chains & Bush Chains

● Order No. Example

KANA 40-2R 240 Links
10ft

Chain No.

Unit

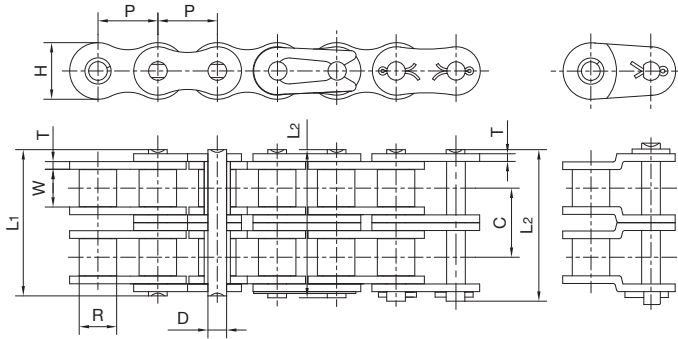

Chain No.	Pitch P mm	Roller Outer Diameter R mm	Inner Link Inner Width W mm	Pin Diameter D mm	Pin Length		Link Plate Width H mm	Link Plate Thickness T mm	Transverse Pitch C mm	Average Tensile Strength kN	Approx. Weight kg/m
					L1 mm	L2 mm					
*25-2	6.35	3.30	3.18	2.31	14.5	15.0	6.00	0.8	6.40	10.0	0.28
*35-2	9.525	5.08	4.77	3.58	22.5	23.3	9.00	1.3	10.13	22.3	0.63
40-2	12.70	7.95	7.85	3.96	31.0	32.2	12.00	1.5	14.38	37.2	1.12
50-2	15.875	10.16	9.40	5.08	38.9	40.4	15.09	2.0	18.11	62.6	2.00
60-2	19.05	11.91	12.57	5.94	48.8	50.5	18.00	2.4	22.78	86.4	2.92
80-2	25.40	15.88	15.75	7.92	62.7	64.3	24.00	3.2	29.29	148.6	5.15
100-2	31.75	19.05	18.90	9.53	76.4	80.5	30.00	4.0	35.76	215.2	7.80
120-2	38.10	22.23	25.22	11.10	95.8	99.7	35.70	4.8	45.44	326.2	11.70
140-2	44.45	25.40	25.22	12.70	103.3	107.9	41.00	5.6	48.87	445.0	15.14
160-2	50.80	28.58	31.55	14.27	123.3	128.1	47.80	6.4	58.55	533.8	20.14
180-2	57.15	35.71	35.48	17.46	138.6	144.4	53.60	7.2	65.84	722.2	29.22
200-2	63.50	39.68	37.85	19.85	151.9	158.8	60.00	8.0	71.55	933.6	32.24

*Bush chain: R in the table indicates the external diameter of the bush