

KCM Stainless Steel Double Pitch Roller Chains with Attachments

Stainless Steel
A1/A2-type Attachments

Order Product Code

KCMC2040- SUS 2L A1 120 Links
10ft

Chain No.

Material Configuration Type

Unit

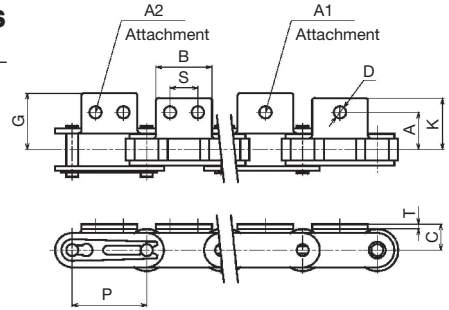



Figure: ALL A1/A2

Double pitch roller chains stainless steel specification.

The S-type and R-type are available for rollers. The A1/A2 types are available for chains with attachments.

Chain No.		Attachment		Pitch P	Common Dimensions				Attachment A1/A2			
Type	Roller Shape	Configuration	Type		C	B	D	T	A	K	G	S
KCM C2040 KCM C2042	S R	ALL 2L	A1 A2	25.40	9.1	19.1	3.6	1.5	12.7	17.4	19.0	9.5
KCM C2050 KCM C2052	S R			31.75	11.1	23.8	5.2	2.0	15.9	21.9	24.0	11.9
KCM C2060H KCM C2062H	S R			38.10	14.7	28.6	5.2	3.2	21.45	28.4	31.8	14.30
KCM C2080H KCM C2082H	S R			50.80	19.1	38.1	6.8	4.0	27.8	37.0	41.1	19.10

Chain No.		Maximum Allowable Tension kN (kgf)	Attachment Attached per Location Approx. Weight g	Approx. Weight kg/m	Unit	
Type	Roller Shape				No. of Links	m
KCM C2040 KCM C2042	S R	0.44 (45)	3	0.49 0.83	120L	3
KCM C2050 KCM C2052	S R					
KCM C2060H KCM C2062H	S R		16	1.46 2.14	80L	
KCM C2080H KCM C2082H	S R					



* There are no OL for chains with stainless steel attachments.

Caution